



THE DRIVING FORCE

BEHIND A GOOD FENCE

T-Posts • Tent Stakes • Pipe Fence • Sign Posts • Fence Posts • Railroad Ties • Median Dividers

"Good enough won't do - it must be right." - K.B. Danuser, Founder 1910



DRIVE LIKE A PRO

ONE-PERSON POST DRIVER

T7



T-post to 7" O.D.
post/pipe

T8-RR



T-post to 8" O.D.
post/pipe or railroad tie

- Jackhammer style power cell offers controlled high-speed driving performance.
- Hydraulic grapple option allows one person to pick up, load, and drive posts.
- Comes standard with a flow control valve. Our flow control valve allows us to run within a wider range of hydraulic requirements, including high flow machines, without accelerated wear on the breaker.
- Additional weight kit option. Fine tune the weight of the driver to match the operating capacity of the vehicle. Increases driving speed up to 50% faster.
- Tool-less driving tool quick change which means no hammer and punch needed to change driving tools.
- Comes standard with a domed driving tool. Flat driving tools and flat railroad tie driving tools (T8-RR only) can also be purchased.
- Post holder with tie down locations for transporting posts/pipe.
- No setup required, it's ready to go to work.
- 1-Year Warranty.

ACCESSORIES / OPTIONS



T7 Flat Driving Tool

7.27" ID

PN 196067F



T7 Domed Driving Tool

7.27" ID

PN 196067



T8-RR Flat Driving Tool

8.27" ID

PN 196074F



T8-RR Domed Driving Tool

8.27" ID

PN 196074



T8-RR Railroad Tie Flat Driving Tool

12.3" ID

PN 196074R



Additional Weight Kit

Adds 616 lbs. to machine weight which reduces vibration and allows for more efficient driving. Includes 14 weight plates. Increases driving speed up to 50% faster than base unit.

PN 200076




Grapple Option

May be added to any base model machine for one-person operation

PN 210040 (T7)

PN 210041 (T8-RR)

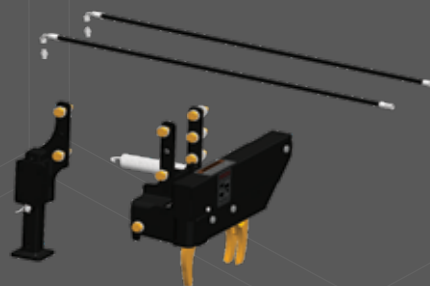

T-Post Adapter

Must be added for driving T-posts.
Can only be used with Flat Driving Tool.



PN 21149



T-Post Adapter Domed Driving Tool Kit

Must be added for driving T-posts.
For use with Domed Driving Tool.

PN 220011






SPECIFICATIONS



Hornet	Model T7	Model T7 w/ Grapple	Model T8-RR	Model T8-RR w/ Grapple
Base Weight	1,180 lb.	1,461 lb.	1,560 lb.	1,679 lb.
Optional Weight Kit	Up to 616 lb., 14 weight plates (44 lb. each)			
Max. Strikes per Minute	500-900		400-800	
Hydraulic Requirements	2,000 - 3,500 PSI 10-30 GPM		2,200 - 3,500 PSI 13-30 GPM	
Driving Tool Inside Diameter (Max Post Size)	Domed: 7.27" Flat: 7.27"		Domed: 8.27" Flat: 8.27" Railroad Tie (Flat): 12.3"	
Excavator Weight*	9,000 lb. and over		13,500 lb. and over	
Energy Class	750 ft.-lb.		1,150 ft.-lb.	
Mount	Skid-Steer Quick Attach & Excavator (not for front-end loaders)			

**Do not exceed the rated operating capacity of your vehicle. The addition of a Hornet adds up to 1,600 lb. of additional weight. Verify that the vehicle has sufficient lifting capacity, in each of the different vehicle positions. On Hornets with a grapple, the post weight will need to be considered as additional weight for lifting capacity considerations.*

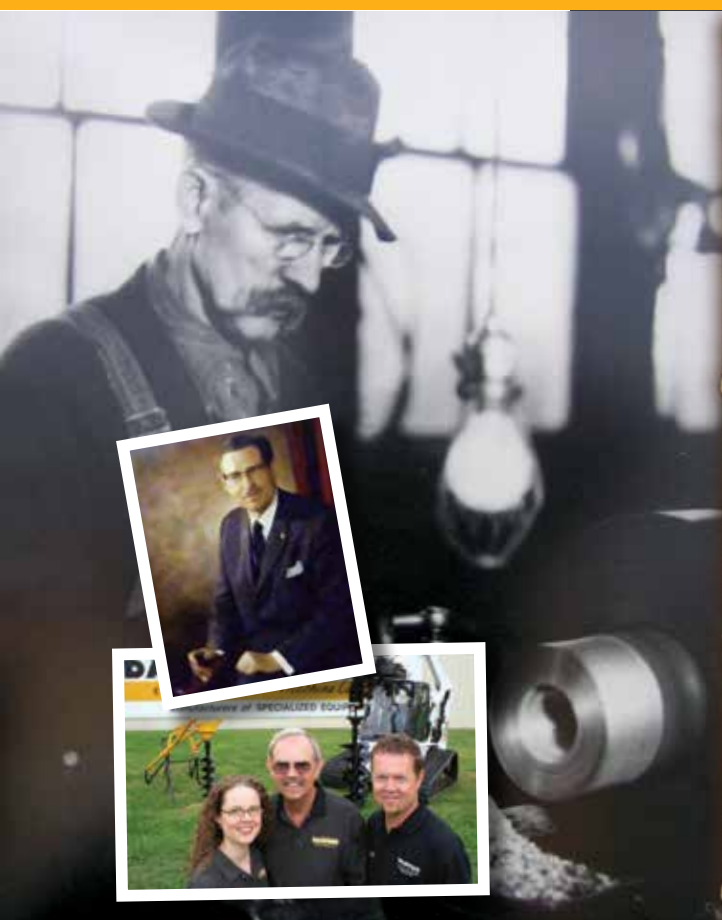

A HISTORY OF INNOVATION

Established in 1910, DANUSER has been family owned and operated by four generations. We have manufactured auger systems since the mid-1940's. With decades of design and manufacturing experience, our machines have stood the test of time. Today our commitment to our customer remains to design and build products that are the benchmark of quality, reliability, and longevity. In the words of our founder K.B. Danuser, "Good enough won't do – it must be right."

DANUSER manufactures several attachments for various equipment, serving several industries worldwide. Please visit www.danuser.com to see our full line of attachments.

Danuser reserves the right to make changes in design, specifications, and prices without notice and without incurring any obligation relating to such changes.



500 E. 3rd St. | P.O. Box 368 | Fulton, MO 65251

573.642.2246 tel
573.642.2240 fax
sales@danuser.com



Visit danuser.com for more Danuser attachments.



PD 5002A